


# TC-08

8-channel thermocouple data logger

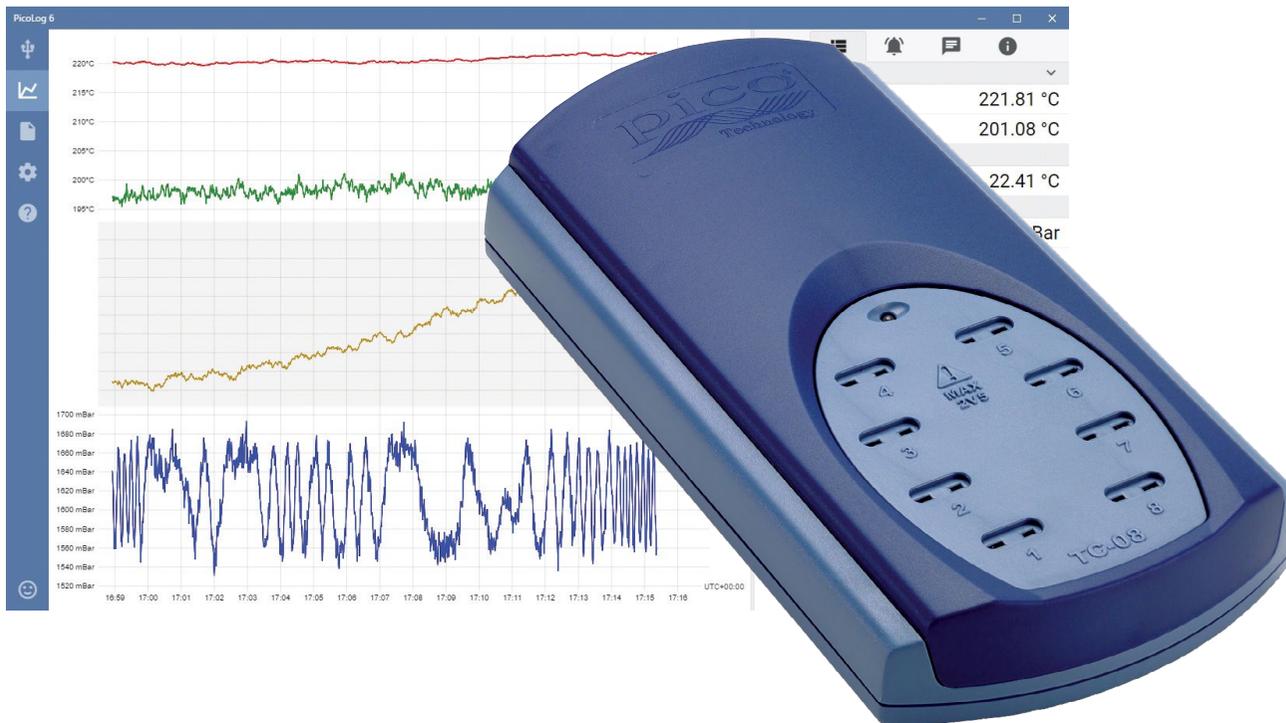

## Low cost, high resolution

Measures and records up to eight thermocouples at once

20-bit resolution and high accuracy

Supports all commonly used thermocouple types

Measures from  $-270\text{ °C}$  to  $+1820\text{ °C}$

Built-in cold junction compensation

Up to 10 measurements per second

USB-connected and powered

Raspberry Pi compatible

Run multiple units on a single PC

Free to download PicoLog 6 software

Free software development kit

Example programs available to download

Free technical support

Free software updates

Compatible with Windows, macOS and Linux

## TC-08 thermocouple data logger


The TC-08 thermocouple data logger offers industry-leading performance and a cost-effective temperature measurement solution. With eight direct thermocouple inputs, the TC-08 can take accurate, rapid readings. In addition, you can use up to 20 units simultaneously on one PC. The logger can measure and record temperatures ranging from  $-270\text{ }^{\circ}\text{C}$  to  $+1820\text{ }^{\circ}\text{C}$  using the appropriate thermocouple type (B, E, J, K, N, R, S, T). It draws power from your computer's USB port, so no external power supply is necessary.

### Wide temperature range

The TC-08 thermocouple data logger is designed to measure a wide range of temperatures using any thermocouple that has a miniature thermocouple connector. Pico supplies a wide range of suitable thermocouples (see [Ordering information](#)).

All types of thermocouple in common use today are supported, allowing an effective temperature range of  $-270\text{ }^{\circ}\text{C}$  to  $+1820\text{ }^{\circ}\text{C}$  (the actual temperature range depends on the thermocouple being used).

You can also use the built-in cold junction compensation (CJC) circuit as a ninth channel to measure ambient temperature.

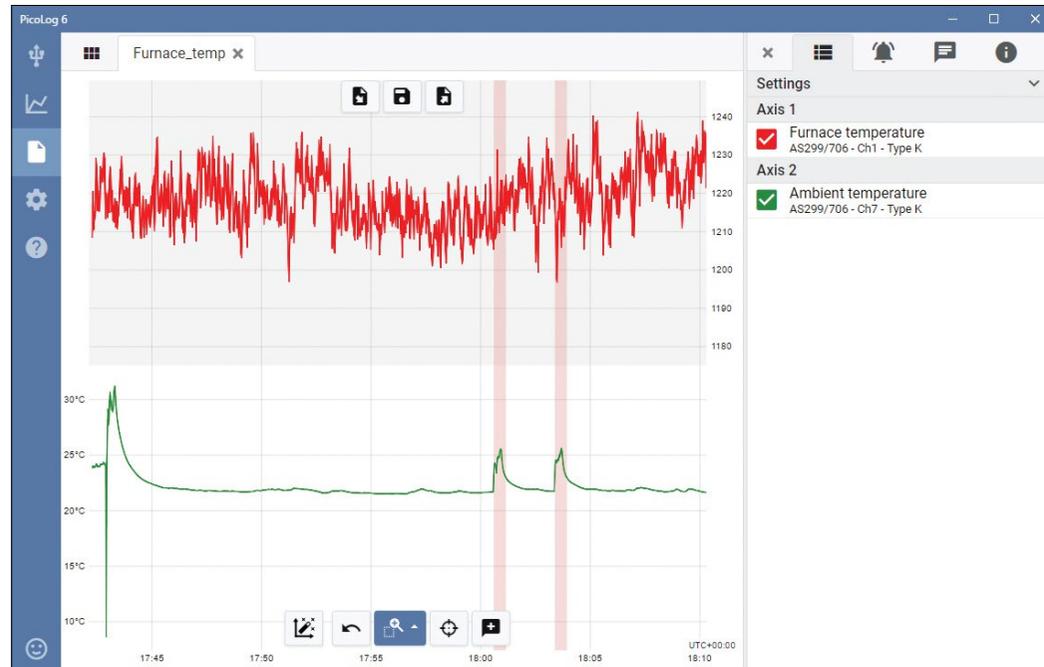

### Fast and accurate temperature data acquisition

With the TC-08 thermocouple data logger, you can make temperature measurements both quickly and accurately.

The short conversion time of the TC-08 means that it can take up to 10 temperature measurements every second (CJC counts as an additional measurement), while the high (20-bit) resolution ensures that the TC-08 can detect minute changes in temperature. For Type K thermocouples, the TC-08 can maintain a better than  $0.025\text{ }^{\circ}\text{C}$  resolution over a  $-250\text{ }^{\circ}\text{C}$  to  $+1370\text{ }^{\circ}\text{C}$  range.

## PicoLog 6 software – straightforward from the start

PicoLog 6 is a complete data acquisition software package for the TC-08 data logger, and is fully compatible with Windows, macOS and Linux. With its clear and user-friendly layout, ideal for use with a mouse or a touchscreen, PicoLog 6 allows you to set up the logger and start recording with just a few clicks of the mouse, whatever your level of data logging experience. Set up simple or advanced acquisitions quickly, and record, view and analyze your data with ease.

**Capture controls**  
Separate Record, Pause and Reset buttons make it harder to press any of them by mistake.

**Save and Export options**  
Copy your graph to the clipboard, save it as a PDF, export the raw data to a CSV file, or save the data and configuration as a robust .picolog database file.

**Alarms**  
Set up alarms to alert you to a range of events. Alarms can take the form of sounds, visual notifications, graph annotations and more.

**Notes & annotations**  
Add notes about the dataset as a whole or annotations about particular points on the graph.

**Device settings view**  
Easily set up and adjust acquisition and math channels on one or more data loggers and check their status at a glance.

**Graph view**  
Display your data in real time, as it is collected, on up to four independent Y axes simultaneously: set them up by dragging and dropping the entries in the Channels & Axes panel on the right.

**Give instant feedback**  
We want to hear from you! Click here to contact Pico with your comments.

**Data view**  
Display all the data collected so far or keep the graph scale the same and pan along as new samples appear.

**Pan and zoom controls**  
Zoom in, zoom out, zoom to a selection or pan through the data with these tools. If you make a mistake, just click Undo.

**Cursors and annotations**  
Use cursors to highlight the data value and time at any point on the graph, or click Add annotation to mark that point with a text note.

**Pullout information panel**  
Manage your channel and axis settings, alarms, notes and capture information in this easy-to-read layout. Close the panel to make more room for the capture graph, and reopen it at any time.

**Multiple devices**  
Log data on up to 20 devices at the same time. Here, three separate data loggers are in use: two TC-08s and one ADC-24 voltage input logger.

**Settings Panel:**

- Layout: Condensed
- Y axes: 1, 2, 3, 4
- Decimal places: 0, 1, 2, 3, 4, 5
- Axis 1:
  - Tank - top A0024/014 | 1 | Type K 112.85 °C
  - Tank - base A0024/014 | 2 | Type K 101.88 °C
- Axis 2:
  - Lab ambient temperature AS299/706 | 1 | Type K 24.99 °C
- Axis 3:
  - Differential 1 - 2 EV377/014 | 1 - 2 | ±1.25 V 883.34 mBar


## Raspberry Pi support

The TC-08 works great when connected to personal computers running Windows, macOS and Linux. Now, with support for Raspbian OS on armhf processors, the TC-08 works with Raspberry Pi 4 and the current 3B and 3B+ computers running Raspbian Stretch.


You can now connect the TC-08 to the Pi and remove the keyboard, mouse and video monitor to make an inexpensive standalone logger that stores captured data locally on an SD card.

Furthermore, connecting your Pi by WiFi or Ethernet, you can internet-enable your Pico logger, which you can then access remotely using a freely available open-source VNC server and viewer.

In addition, using Power over Ethernet (PoE) capability on the Raspberry Pi 3B+ and then pairing with the PoE PIHAT not only eliminates the need for an external power supply and powered USB hub, it also internet-enables your logger.

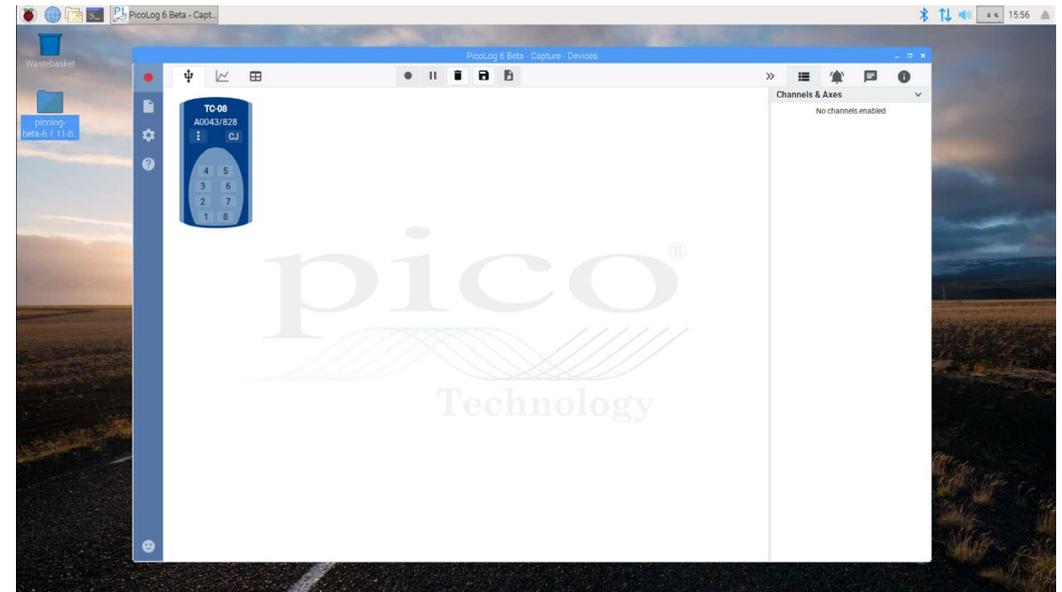

*PicoLog 6 running under Raspbian OS on a Raspberry Pi with a TC-08 connected.*

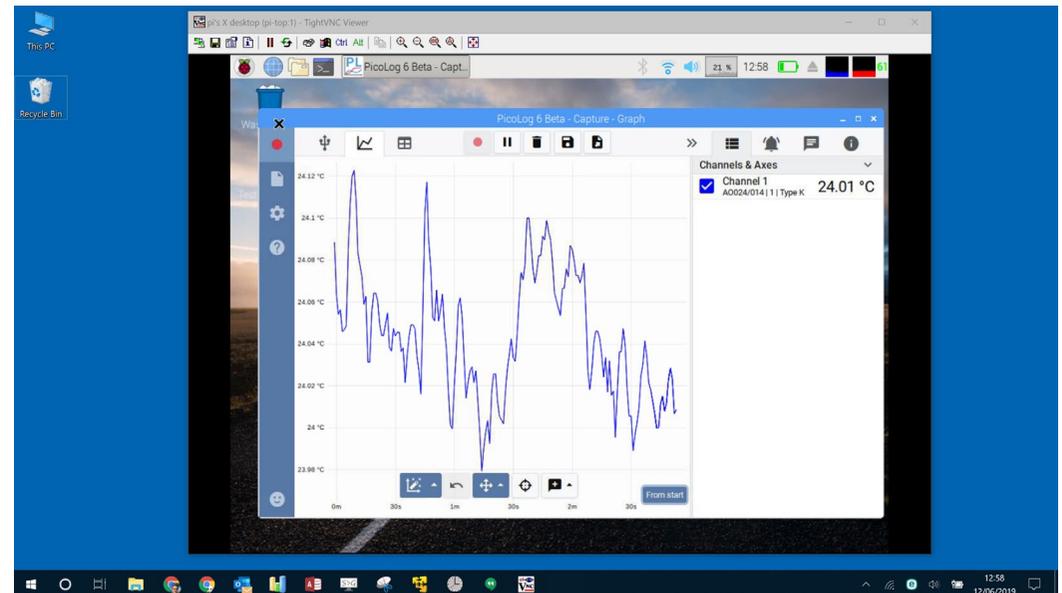


*PicoLog 6 running under Raspbian OS with a TC-08 connected, being viewed and controlled in Windows 10 using freely available open-source VNC server software and viewer.*

## Math channels

Sometimes you need to use data from one or more measurement channels to graph and record a calculated parameter. You can use the PicoLog 6 equation editor to set up simple math channels such as A-B or more complex functions such as log, sqrt, abs, round, min, max, mean and median.


PicoLog 6 treats math channels like any other channel, so you can still set alarms and annotate them.

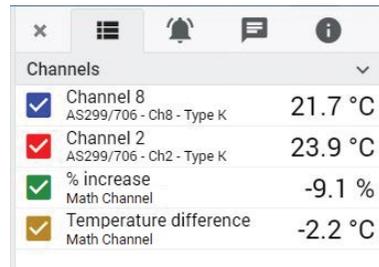

Channel	Value
<input checked="" type="checkbox"/> Channel 8 AS299/706 - Ch8 - Type K	21.7 °C
<input checked="" type="checkbox"/> Channel 2 AS299/706 - Ch2 - Type K	23.9 °C
<input checked="" type="checkbox"/> % increase Math Channel	-9.1 %
<input checked="" type="checkbox"/> Temperature difference Math Channel	-2.2 °C

## Alarms

In PicoLog 6, you can set up alarms to alert you to various events. These can be as simple or as complex as you like: alarms can trigger on a signal threshold or disconnection of the data logger, or you can set up a logic expression of your own. Alarms can play sounds, display visual alerts, run applications or mark when the event occurred on the graph.

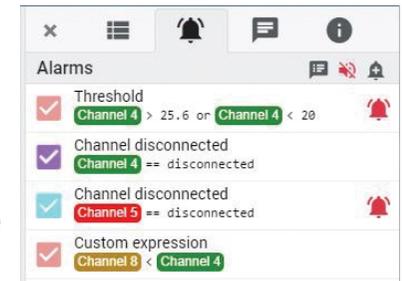


Alarm	Value
<input checked="" type="checkbox"/> Threshold Channel 4 > 25.6 or Channel 4 < 20	
<input checked="" type="checkbox"/> Channel disconnected Channel 4 == disconnected	
<input checked="" type="checkbox"/> Channel disconnected Channel 5 == disconnected	
<input checked="" type="checkbox"/> Custom expression Channel 8 < Channel 4	

## Intuitive logger and channel setup

The Devices view lets you set up a multichannel acquisition system in a simple way, with the option to use multiple different Pico data loggers simultaneously. PicoLog shows you an image of each connected device, so you can quickly and easily enable or disable channels and set up their properties.

On the right, you can see the device setup for the acquisition on the previous page: two TC-08s and one ADC-20 voltage input logger.

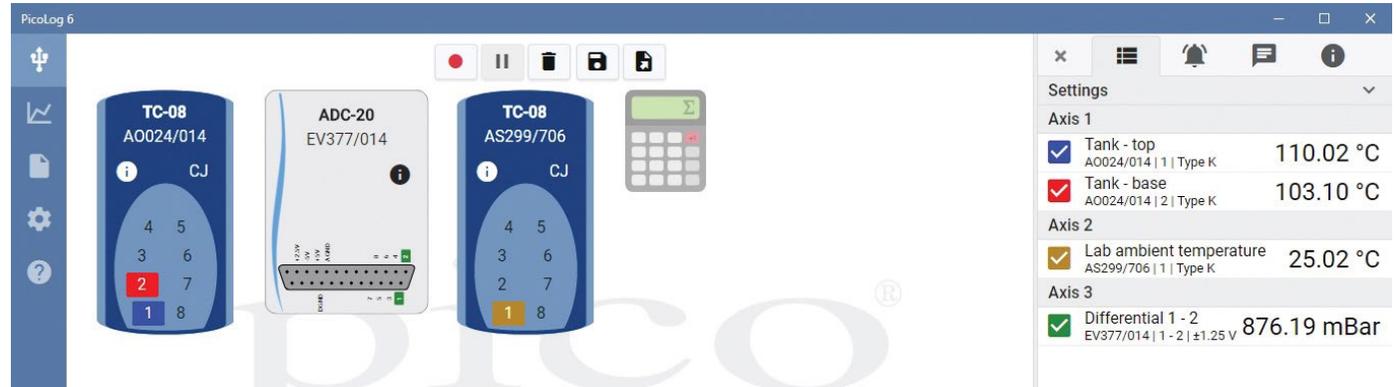

Axis	Channel	Value
Axis 1	Tank - top A0024/014   1   Type K	110.02 °C
Axis 1	Tank - base A0024/014   2   Type K	103.10 °C
Axis 2	Lab ambient temperature AS299/706   1   Type K	25.02 °C
Axis 3	Differential 1 - 2 EV377/014   1 - 2   ±1.25 V	876.19 mBar

## Robust file format

At the heart of PicoLog 6 is the file system, which stores live capture data directly to a robust database, rather than to a single file that is vulnerable to corruption and data loss. If the computer is shut down and rebooted, PicoLog will only lose the data during the outage – saving resumes when you restart the software.

This file system also means that the size of the dataset you can capture you is virtually unlimited – the only restriction is the size of your computer's hard disk!

The .picoLog file format is compatible across all operating systems, and there is no need to set up a file to save to before the capture is complete. You can also save mid-capture if you wish to share the data collected so far. Since anyone can download and install PicoLog 6 for free, you can easily share saved data with co-workers, customers and suppliers for offline post-analysis.


Data can be exported as CSV. In addition, you can export a PDF containing a graph, channel configuration, capture notes, annotation notes and alarm trigger history.

## PicoSDK®

Pico's software development kit, PicoSDK, is available free of charge and allows you to write your own software and interface to third-party software packages.

Pico also maintains repositories of example code on GitHub ([github.com/picotech](https://github.com/picotech)), showing how to use PicoSDK with software packages such as Microsoft Excel, National Instruments LabVIEW and MathWorks MATLAB, or with programming languages including C, C++, C# and Visual Basic .NET.

PicoSDK and the *TC-08 Programmer's Guide* are available to download from [www.picotech.com/downloads](http://www.picotech.com/downloads).



## Try the PicoLog 6 software today!

PicoLog 6's built-in demo mode allows you to try out the full functionality of the software with a choice of virtual devices and simulated live data. You also can use PicoLog 6 to view previously saved data, even with no device connected. Visit [www.picotech.com/downloads](http://www.picotech.com/downloads) and select **PicoLog Data Loggers** to get your copy.

## Specifications

Hardware	
Number of channels (single unit)	8
Maximum number of channels (using up to 20 units)	160
Conversion time	100 ms per thermocouple channel + 100 ms for CJC (this can be disabled if all channels are used as voltage inputs)
Temperature accuracy	Sum of $\pm 0.2\%$ of reading and $\pm 0.5\text{ }^{\circ}\text{C}$
Voltage accuracy	Sum of $\pm 0.2\%$ of reading and $\pm 10\text{ }\mu\text{V}$
Overvoltage protection	$\pm 30\text{ V}$
Maximum common-mode voltage	$\pm 7.5\text{ V}$
Input impedance	2 M $\Omega$
Input range (voltage)	$\pm 70\text{ mV}$
Resolution	20 bits
Noise-free resolution	16.25 bits
Thermocouple types supported	B, E, J, K, N, R, S, T
Input connectors	Miniature thermocouple
General	
Connectivity	USB 2.0
Device connector type	USB 2.0, Type B
Power requirements	USB port
Dimensions	201 x 104 x 34 mm (7.91 x 4.09 x 1.34 in)
Temperature range, operating	0 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$
Temperature range, operating, for quoted accuracy	20 $^{\circ}\text{C}$ to 30 $^{\circ}\text{C}$
Temperature range, storage	-20 $^{\circ}\text{C}$ to 60 $^{\circ}\text{C}$
Humidity range, operating	5 to 80 % RH non-condensing
Humidity range, storage	5 to 95 % RH non-condensing
Altitude	Up to 2000 m
Pollution degree	Pollution degree 2
Water resistance	Not water-resistant
Safety approvals	Designed to 2014/35/EU: Low Voltage Directive
EMC approvals	Tested to 2014/30/EU: Electromagnetic Compatibility Directive
Environmental approvals	RoHS and WEEE compliant
Software	PicoLog 6, PicoSDK (available from <a href="http://www.picotech.com/downloads">www.picotech.com/downloads</a> ) Example code (available from Pico's GitHub organization page, <a href="https://github.com/picotech">github.com/picotech</a> )

General (continued)	
PC requirements	Windows, macOS, Linux or Raspbian. For supported OS versions, see <a href="#">PicoLog 6 Release Notes</a> . Hardware as required by the operating system.
Documentation	Quick Start Guide User's Guide Programmer's Guide EU Declaration of Conformity All relevant documentation is available for download from <a href="http://www.picotech.com/downloads">www.picotech.com/downloads</a>

## Compatible thermocouples

The TC-08 is compatible with all commonly used thermocouples, offering high accuracy without compromising acquisition speed. Thermocouple types and temperature ranges are shown in the table below.

Type	Overall range (°C)	0.1 °C resolution	0.025 °C resolution
B	20 to 1820	150 to 1820	600 to 1820
E	-270 to 910	-270 to 910	-260 to 910
J	-210 to 1200	-210 to 1200	-210 to 1200
K	-270 to 1370	-270 to 1370	-250 to 1370
N	-270 to 1300	-260 to 1300	-230 to 1300
R	-50 to 1760	-50 to 1760	20 to 1760
S	-50 to 1760	-50 to 1760	20 to 1760
T	-270 to 400	-270 to 400	-250 to 400

## Also measures voltage and current!

The optional TC-08 single-channel terminal board plugs into one channel on the data logger and has a set of screw terminals, allowing you to connect sensors with voltage or current outputs to the data logger without any need for soldering. The four input ranges ( $\pm 50$  mV,  $\pm 500$  mV,  $\pm 5$  V and 4–20 mA) allow you to measure a wide range of signals.

## Ordering information

Pico offers both off-the-shelf and built-to-order thermocouples for use with the TC-08. If you require a custom build for your



application, our Technical Support team is available to discuss your requirements. You can contact the team at [support@picotech.com](mailto:support@picotech.com).

## Type K and type T thermocouples

Order code	Product name	Description	USD*	EUR*	GBP*
SE059	SE059 thermocouple type K	High-temperature, exposed tip, fiberglass-insulated, 1 m	26	22	18
SE060	SE060 thermocouple type K	High-temperature, exposed tip, fiberglass-insulated, 2 m	36	31	25
SE061	SE061 thermocouple type K	High-temperature, exposed tip, fiberglass-insulated, 3 m	45	38	31
SE062	SE062 thermocouple type K	High-temperature, exposed tip, fiberglass-insulated, 5 m	65	55	45
SE002	SE002 thermocouple type K	Probe, air, 4.5 mm tip	48	41	33
SE001	SE001 thermocouple type K	Exposed tip, fiberglass-insulated, 1 m	10	9	7
SE030	SE030 thermocouple type K	Exposed tip, fiberglass-insulated, 2 m	14	12	9
SE031	SE031 thermocouple type K	Exposed tip, fiberglass-insulated, 5 m	20	17	15
SE000	SE000 thermocouple type K	Exposed tip, PTFE-insulated, 1 m	10	9	7
SE027	SE027 thermocouple type K	Exposed tip, PTFE-insulated, 2 m	14	12	9
SE028	SE028 thermocouple type K	Exposed tip, PTFE-insulated, 3 m	15	13	10
SE029	SE029 thermocouple type K	Exposed tip, PTFE-insulated, 10 m	30	26	21
SE003	SE003 thermocouple type K	Insertion, 3.3 mm tip	40	34	28
SE004	SE004 thermocouple type K	Ribbon surface, 8 mm tip	48	41	33
SE056	SE056 thermocouple type T	5 mm × 50 mm stainless steel waterproof tip, silicone-insulated, 3 m	40	34	28
SE057	SE057 thermocouple type T	5 mm × 50 mm stainless steel waterproof tip, silicone-insulated, 5 m	55	46	38
SE058	SE058 thermocouple type T	5 mm × 50 mm stainless steel waterproof tip, silicone-insulated, 10 m	96	79	66
SE051	SE051 thermocouple type T	Exposed tip, fiberglass-insulated, 1 m	10	9	7
SE052	SE052 thermocouple type T	Exposed tip, fiberglass-insulated, 2 m	13	11	9
SE053	SE053 thermocouple type T	Exposed tip, fiberglass-insulated, 3 m	16	14	11
SE054	SE054 thermocouple type T	Exposed tip, fiberglass-insulated, 5 m	22	19	15
SE055	SE055 thermocouple type T	Exposed tip, fiberglass-insulated, 10 m	30	26	21
SE046	SE046 thermocouple type T	Exposed tip, PTFE-insulated, 1 m	10	9	7
SE047	SE047 thermocouple type T	Exposed tip, PTFE-insulated, 2 m	13	11	9
SE048	SE048 thermocouple type T	Exposed tip, PTFE-insulated, 3 m	16	14	11
SE049	SE049 thermocouple type T	Exposed tip, PTFE-insulated, 5 m	22	19	15
SE050	SE050 thermocouple type T	Exposed tip, PTFE-insulated, 10 m	30	26	21

\* Prices correct at the time of publication. Sales taxes not included. Please check [www.picotech.com](http://www.picotech.com) for the latest prices before ordering.

## Ordering information (continued)

Order code	Product name	USD*	EUR*	GBP*
PP222	TC-08 thermocouple data logger with USB cable	409	349	289

## Optional accessories

Order code	Product name	USD*	EUR*	GBP*
PP624	Single-channel terminal board for use with TC-08 thermocouple data logger	30	26	21
MI106	Replacement Pico blue USB 2.0 cable, 1.8 m**	9	7	6
TA268	Pico blue USB 2.0 cable, 0.5 m**	9	7	6
MI121	Pico blue USB 2.0 cable, 4.5 m**	17	14	12
CC001	Calibration certificate for thermocouple loggers	83	70	58

\* Prices correct at the time of publication. Sales taxes not included. Please check [www.picotech.com](http://www.picotech.com) for the latest prices before ordering.

\*\* Pico blue USB cables are designed and built specifically for use with Pico Technology oscilloscopes and data loggers in order to minimize voltage drop and noise. Use your TC-08 data logger only with a Pico blue USB cable.



### UK global headquarters

Pico Technology  
James House  
Colmworth Business Park  
St. Neots  
Cambridgeshire  
PE19 8YP  
United Kingdom  
☎ +44 (0) 1480 396 395  
✉ [sales@picotech.com](mailto:sales@picotech.com)

### North America regional office

Pico Technology  
320 N Glenwood Blvd  
Tyler  
TX 75702  
United States  
☎ +1 800 591 2796  
✉ [sales@picotech.com](mailto:sales@picotech.com)

### Asia-Pacific regional office

Pico Technology  
Room 2252, 22/F, Centro  
568 Hengfeng Road  
Zhabei District  
Shanghai 200070  
PR China  
☎ +86 21 2226-5152  
✉ [pico.asia-pacific@picotech.com](mailto:pico.asia-pacific@picotech.com)

Errors and omissions excepted. *Pico Technology*, *PicoLog* and *PicoSDK* are internationally registered trademarks of Pico Technology Ltd. *LabVIEW* is a trademark of National Instruments Corporation. *Linux* is a registered trademark of Linus Torvalds, registered in the U.S. and other countries. *macOS* is a trademark of Apple Inc., registered in the U.S. and other countries. *MATLAB* is a registered trademark of The MathWorks, Inc. *Windows* and *Excel* are registered trademarks of Microsoft Corporation in the United States and other countries. *GitHub* is a registered trademark of GitHub, Inc.

MM001.en-10. Copyright © 2004–2020 Pico Technology Ltd. All rights reserved.

[www.picotech.com](http://www.picotech.com)



Pico Technology



@LifeAtPico



@picotechnologyLtd



Pico Technology



@picotech